




SEIKOH GIKEN

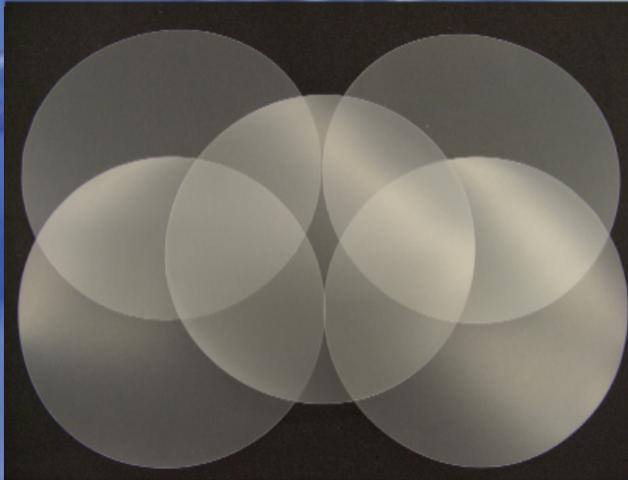

New Final Polishing Film

■ Features


- Smooth polishing with minimum scratches
- Designed to provide GR-326 endface geometry
- Stable fiber height over use of film life
- Easily achieve cost reduction
- No binder contamination on fiber endface
- Ideal for APC & UPC quality polishes
- UPC level polishing result

■ Specifications

Part Number	XF5D,
Material	SiO ₂
Diameter	127mm, 110mm, 70mm
Color	Translucent
Application	2.5mm and 1.25mm Zr. Ferrule
Film Life	5 to 10 times
Package	100pcs / set
Storage Condition	Temp: 10~30°C Humid: 30~70%

■ Tested Data

Polisher : SFP-550
 Holder : PH55-FF-20
 Polishing Time : 1.0min
 Polishing Liquid : Purified water

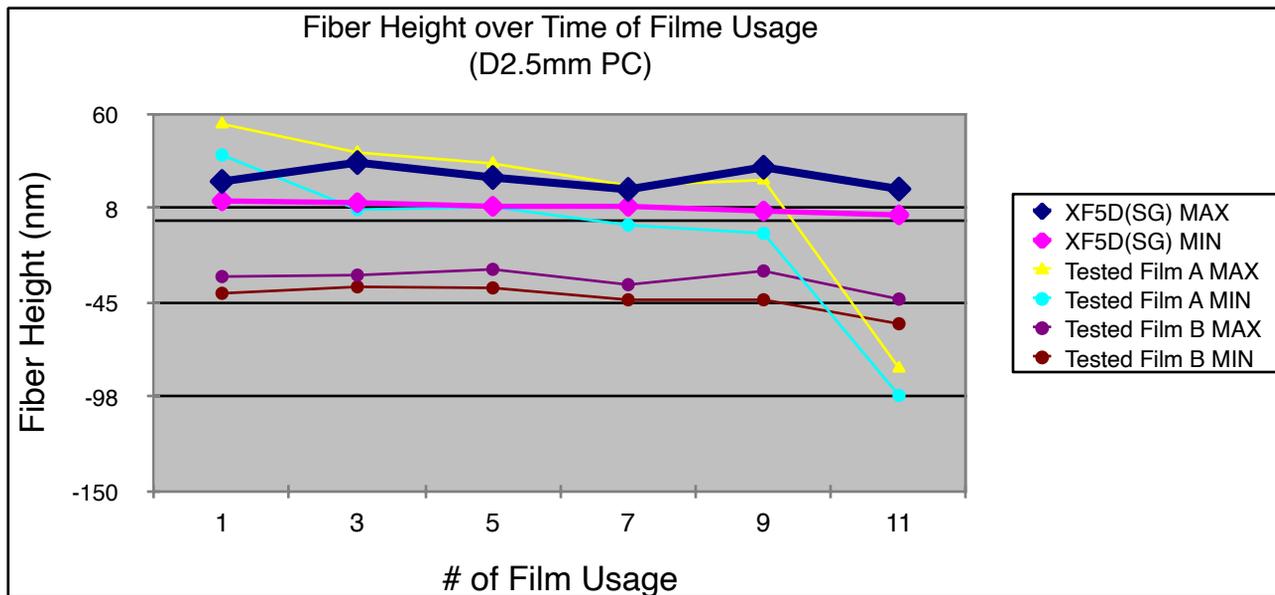

Note: Data in this sheet was under the condition of using SG polishing machine and process.

XF5D film shows consistent & closest 0nm fiber height results over times of use other tested finishing films.

■ Ordering Information

Part Number	Description	Sheet / pack
XF5D	5" Final Polishing film	100
XF4D	4" Final Polishing film	100
XF07	70mm Final Polishing film	100

Ver. E1.0

China Distributor:

Shenzhen Richen Industry Co., Ltd
 Tel: +86 755 86655593; 86655448; 86655579
 Website: www.pztest.com Email: info@pztest.com