

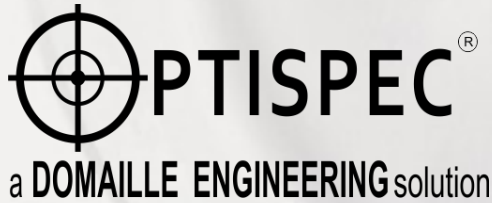


the OpticSpec® DE3200-S2

Bare Fiber+

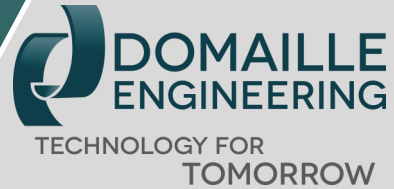


Domaille Engineering proudly introduces our OpticSpec® DE3200-S2 Bare Fiber+. The DE3200-S2 allows inspection of bare fiber end face and with a quick turn the bare fiber side profile. The additional position for a standard connector makes the DE3200-S2 ideal for production departments and engineering labs.

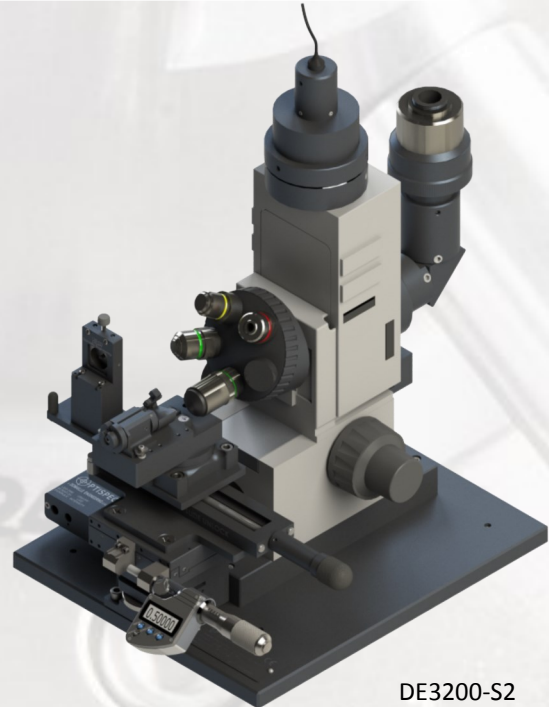

DE3200-S2


Monitor and adapters sold separately




5x-Side View




5x-End View



10x-Side View



10x-End View



20x-Side View



20x-End View

Available Now

Manufactured to Domaille's exacting high quality standards

Benefits at a Glance:

- Rotating bare fiber stage to view both end face and side profile
- Optional V-Groove or Rotating 1.25um Fiber Holder
- Additional Stage for Single Adapter accommodations of UPC, APC and Multi-Fiber
- Five position turret for easy magnification changes between 5x, 10x, 20x, and 40x
- Interferometer options available