




JETPRESSURE-微管压力测试仪

JetPressure为专业安装人员提供量身定制的解决方案，提供全面的电子版本微管压力文档。这款先进的设备与Jetting JetLogger无缝集成，该设备是与经验丰富的安装人员合作开发的，在安装过程中他们感觉到有效管道状况评估十分必要。

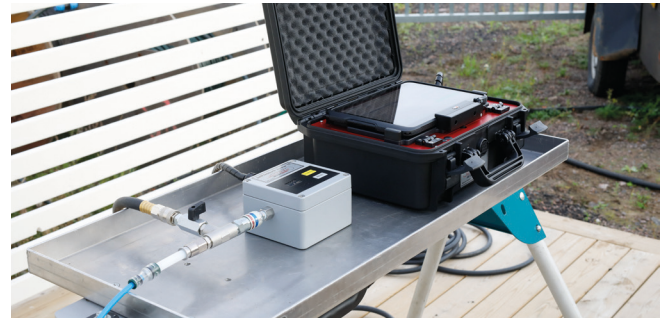

JETPRESSURE - 精确压力测量装置

- 独立于吹缆机工作
(在实际光缆吹制之前进行管道压力测试)
- 易于使用
- 快速连接吹缆机
- 体积小巧
- 无噪音

技术参数



重量:
约 1,1 kg



WxHxD
165x140x80mm



安装指引

1. 接上连接适配器
2. 气源接到管道上
3. 微管接好
准备好7-10-12 mm软管
4. 把Jetlogger跟Jetpressure接好
5. 在吹缆模板内输入位置数据和管道参数
在“吹缆机”项下的菜单内选择“压力测试仪”
6. 启动空压机并开始供气
7. 微管内充足气后关闭气阀
8. 按下Jetpressure上的“Reset”按键，然后点击“start session”
9. Jetpressure每60 秒在Jetlogger内记录数据
10. 推荐每5-10分钟进行一次数据采集
11. 结束工作
12. 存储数据
13. 管内空气排空

⚠ Important, open valve and release air from pipe before disconnecting Jetpressure from pipe.
Risk of personal injury when disconnecting the pressure tester when the duct is pressurized.

Jetpressure如何校准

依海拔/压力差异3 4")#/"00-/"需要校准。

请按住Jetpressure上的两个按钮，然后单击位于电池正上方的Jetlogger电源按钮进行校准

Bar跟PSI之间单位换算

按下Jetpressure上的reset按键，同时按下Jetlogger上的电源键(位于电池上方)。同样顺序实现PSI与Bar之间的切换。



14:10

Mon, Feb 27, 2023

JetLogger

Fiber Blowing Protocol

Project		Demo	
Address		Address	
Company		Jetting	
Operator		Johan	
Comments		Comments	
Time - Duration(hh:mm:ss)		27.02.2023, 14:10	Location (GPS) 00,0000', 0,00000', 00,000 m
Pipe parameters		Cable parameters	
Manufacturer Demo		Manufacturer Manufacturer	
Pipe type Singel		Cable type Cable type	
Color / Description Blue		Kabel-Ø: Cable-Ø	
Type of pipe laying		Fiber Count no.	
Type of pipe laying		Cable drum-No.	
Inner pipe diameter 3,5		Cable temperature Temperature	
Outer pipe diameter 7		Metrology / Environment	
Pipe temperature Temperature		Start End	
Inner pipe wall surface		Route distance	
Smooth Grooves		Operating temperature 21.9°	
		Humidity 28.0	
		Machine / Compressor	
		Fiber blowing machine	
		Pressure Tester	
		Lubricant Lubricant	
		Compressor Compressor	
		Oil separator Aftercooler	
		Crash test carried out Yes No	
		Max. Pushing force:	
		Safety shutdown Yes No	
		P RHT 90245C 21.9 °C 28 %	
		SEARCHING FOR BLUESENSOR	
		START SESSION	

Jetlogger 界面



Jetpressure 界面