



SEIKOH GIKEN

~Global Solutions in Optical Precision~

The World's Exclusive Benchttop Fiber Cleaner ~ Newly Upgraded FerrulePro™ Version 3 for Wet-to-Dry combination cleaning for Multi-Fiber ~

FerrulePro™ automates the final cleaning of all types of terminated fiber products, a critical task where performance once depended largely on the production line worker's skill. With the release of the SPR-3 model, Multi-Fiber cable production lines can utilize a Wet-Dry combination cleaning to ensure a debris-free, lint-free endface in less than 3.0 second cycles.



ferrule
PRO 3.0

■ Key Features

- SPR-3 is designed with a unique forward-reverse motion that offer double-action cleaning of the ferrule endface.
- This double motion action – along with the optimum solvent liquid - achieves excellent first-pass cleaning yield of MT ferrule endface after slurry polishing.
- Cleaning cycle for the Multi-Fiber ferrules/connectors time <= 3.0 seconds
- LED lighting on chuck mounting enface improves visibility for user.
- Compatible with all existing Holding Chucks and Cleaning Cassette SPR-10K.
- Affordable price for easy initial Return on investment.


■ Specification/ Ordering Information

Unit Part Number	SPR-3
Cassette Part Number	SPRP-10K
Dimension	120(W) x 260(D) x 200(H) mm
Weight	Main unit : 2kg Replacement cassette: 0.5kg
Power Supply	AC 100-240V 50/60Hz
Cleaning Media	Lint free cleaning paper in a replaceable cassette
Applicable Connector	MT ferrule, MPO connector (PC/APC) with standard chuck
Applicable Connector (optional)	SC/PC, SC/APC, LC/PC, LC/APC, FC/PC, FC/APC, ST/PC, MU/PC, MU/APC, D1.25mm Ferrule, D2.5mm Ferrule, E2000PC, E2000APC, LC-Duplex/PC, LC Connector housing, MDC/PC, MDC-Jr/PC, SN/PC

Standard Accessories for FerrulePro™ 3.0

Description		Part No.	Qty
Holding Chuck	MT/PC Ferrule	SPR-H8	1pc. each
	MPO/PC Connector	SPR-H9	
	MT/APC Ferrule	SPR-H18	
	MPO/APC Connector	SPR-H19	
Replacement Cassette	Standard Cassette	SPRP-10K	1pc
Others	AC Adaptor (100-240VAC)	SPR-AC	1pc
	Operation Manual	N/A	1pc

Note: Above accessories are subject to change without notice. For 2.5mm/1.25mm connector/Ferrule cleaning, please go to "Accessories" in our website for more information.



Replacement Cassette



Holding Chuck



Cleaning Solvent



Cleaning Pen




Optional Accessories

Description		Part No.	Qty
Option A	Cleaning Solvent	SPR-S30	2pcs
	Pump Dispenser	SPR-PD1	1pc
Option B	Cleaning Pen	FW2150	1pc

Note: Shipping restrictions may apply.



Cleaning Performance

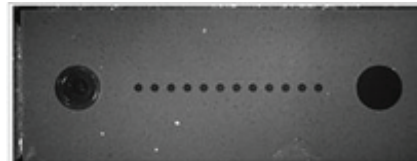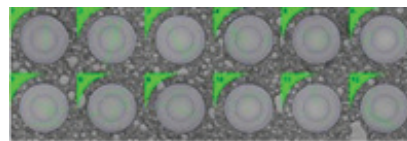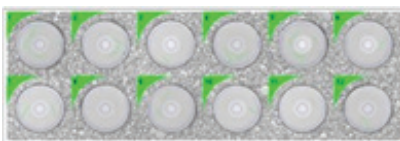

Video go to our website!

 www.pztest.com

China Distributor:

Shenzhen Richen Industry Co., Ltd

Tel: +86 755 86655593 , 86655448, 86655579, 86655446

Email: info@pztest.com Website: www.pztest.com

